


## Features

- DesignLights Consortium Listed (DLC)
- High lumen efficiency and high CRI
- Environmentally friendly with no mercury
- Utilizes magnets for easy install
- LED life 50,000 hours
- ETL / cETL Listed
- 5 years limited warranty

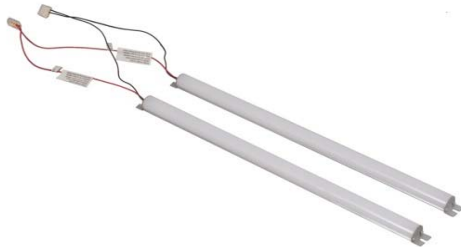

## Specifications

Model	Input	Freq	Wattage	CCT	CRI	Lumen*	Retrofit	PF	THD
RT-2x2-2L(4000K)	120-277V	60Hz	25W	4000K	> 80	2200	2 strips - 2'x2' troffers	>0.9	<20%
RT-2x2-2L(5000K)	120-277V	60Hz	25W	5000K	> 80	2275	2 strips - 2'x2' troffers	>0.9	<20%
RT-2x2-3L(4000K)	120-277V	60Hz	36W	4000K	> 80	3260	3 strips - 2'x2' troffers	>0.9	<20%
RT-2x2-3L(5000K)	120-277V	60Hz	36W	5000K	> 80	3370	3 strips - 2'x2' troffers	>0.9	<20%
RT-2x4-2L(4000K)	120-277V	60Hz	50W	4000K	> 80	4750	2 strips - 2'x4' troffers	>0.9	<20%
RT-2x4-2L(5000K)	120-277V	60Hz	50W	5000K	> 80	4920	2 strips - 2'x4' troffers	>0.9	<20%
RT-2x4-3L(4000K)	120-277V	60Hz	75W	4000K	> 80	7220	3 strips - 2'x4' troffers	>0.9	<20%
RT-2x4-3L(5000K)	120-277V	60Hz	75W	5000K	> 80	7460	3 strips - 2'x4' troffers	>0.9	<20%


\*nominal lumen output



# Installation


## Installation

1. Turn off power and remove door frame and diffuser
2. Remove existing lamps, lamp holder, socket brackets, ballast cover, and electronic ballasts
3. Secure LED strips with self-tapping screws
4. Place LED driver in the location where the electronic ballast was, secure with self-tapping screws
5. Wire LED strips and driver according to wiring diagram
6. Connect input wires with driver with wire connectors
7. Place the original ballast cover back
8. Install lens & frame

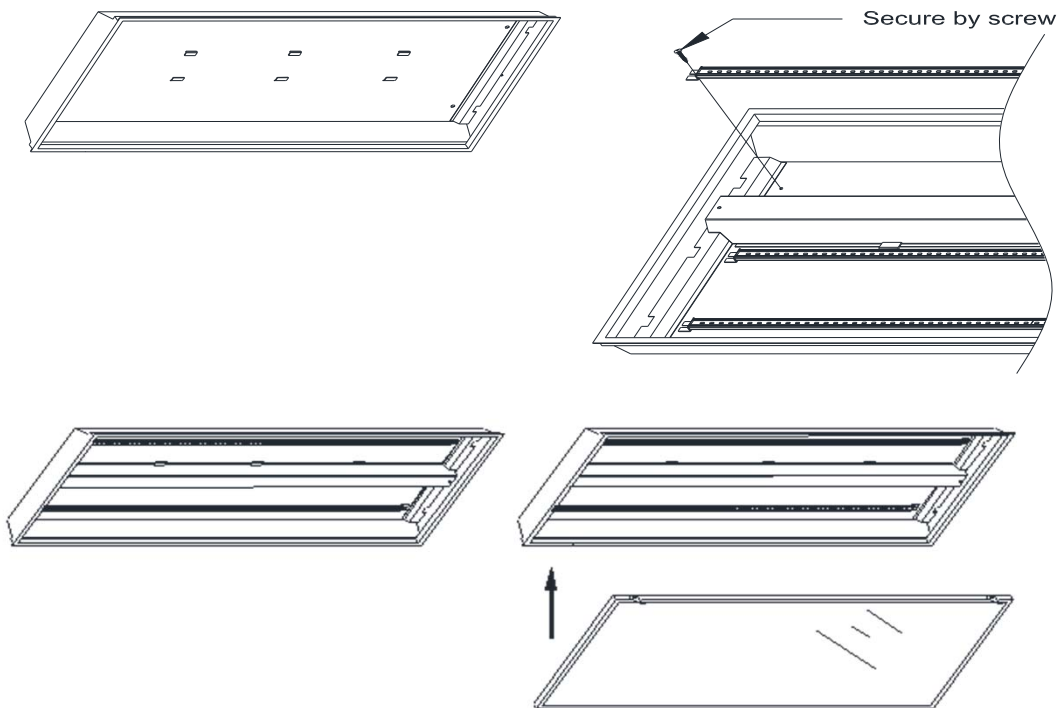

## connection of configurations

### 2 Lights

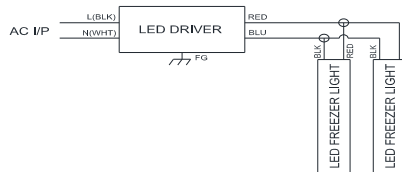

### 3 Lights

