COMMERCIAL LIGHTING DEVICES

FL-50C2 6000lm

Arm Knuckle Mounting

"U" Bracket

Trunnion Bracket

Parameter

Model No.:	FL-50C2-XX-X
Power Consumption:	50W
Input Voltage:	100-277Vac 50/60Hz
LED Type	SMD3030
Lumens Output:	6000lm
CRI	70+
Color Temperature:	3000K,4000K, 5000K, 5700K
Lighting effect	100°
Power Factor:	>0.93
IP Rating	IP65 / Wet location
Working Temp.:	-20° C ~ 50° C
Storage Temp.:	-40° C ~ 70° C
Finish:	Brown
Housing:	Aluminum
Diffuser:	Tempered glass
Installation:	C, D, E Three kinds adaptors
Lifespan(L70):	>80,000 Hours

Features

- DLC Listed.
- ETL, cETL, DLC Listed
- Die-Casting Aluminum
- Tempered glass lens.
- 5 Years Warranty

Intertek
5006572

Dimension & Picture

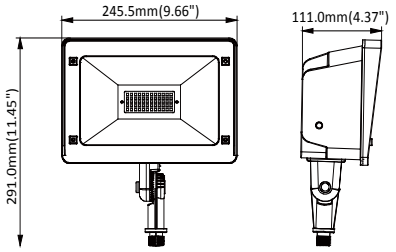

Arm Knuckle Mounting

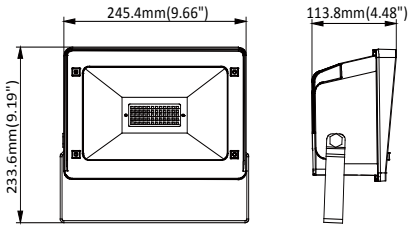

"U" Bracket

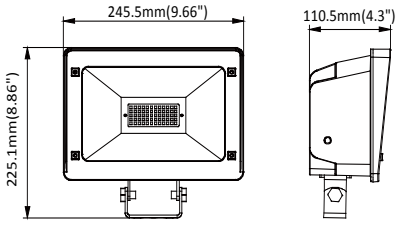

Trunnion Bracket

Model No.	Power	Voltage	CCT	Lumens	CRI	Adaptor
FL-50C2-50-D	50W	100-277Vac	5000K	6000lm	70+	Arm Knuckle
FL-50C2-50-E	50W	100-277Vac	5000K	6000lm	70+	"U" Bracket
FL-50C2-50-C	50W	100-277Vac	5000K	6000lm	70+	Trunnion Bracket

COMMERCIAL LIGHTING DEVICES
188 South Service Rd Stoney Creek, Ontario L8E 3H6
905 662 9526 cld@cldinc.ca www.cldinc.ca